





High-Load NC Live Center



A TYPE

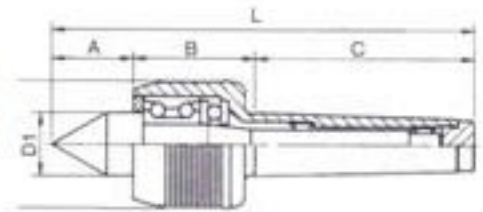

B TYPE

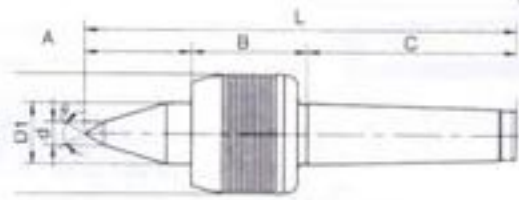

- Shaft uses material SKD11: through vacuum heat treatment, it is even more durable, hardness is as high as (HRC60°± 2°) and satisfied wear-resistance. Main body is made of SCM21 material.
 - Front end is constituted by SKF angular contact ball bearing & thrust ball bearing. middle & rear ends are comprised of needle roller bearing assembly.
 - These centers are suitable for NC lathe at high-speed & heavy-load operation, water-proof.
- ※ B Type is applicable in the metal workings on small workpieces.

Unit:mm

ORDER NO.	A	B	C	D	D1	b	L	d1	Accuracy	Speed Max	θ	G.W. weight kgs	Packing L X W X H	CODE NO.
VCF-MT3A	38	50	86	53	30	-	174	12	0.003	5000RPM	60°	1.28kgs	240 x 70 x 61	5001-030
VCF-MT4A	45	60	108	68	32	-	213	12	0.003	4500RPM	60°	2.45kgs	253 x 92 x 80	5001-031
VCF-MT5A	52	70	136	87	40	-	258	18	0.003	3000RPM	60°	4.65kgs	303 x 108 x 101	5001-032
VCF-MT3B	52	50	86	53	25	10	188	12	0.003	5000RPM	60°	1.3 kgs	240 x 70 x 61	5001-033
VCF-MT4B	55	60	108	68	32	12	223	12	0.003	4500RPM	60°	2.46kgs	253 x 92 x80	5001-034
VCF-MT5B	67	70	136	87	40	14	273	18	0.003	3000RPM	60°	4.7 kgs	303 x 108 x 101	5001-035