





A TYPE

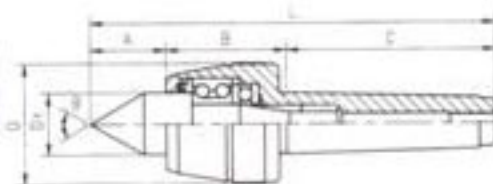

B TYPE

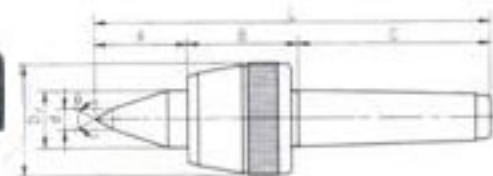

WATER-PROOF TYPE

- Center shaft is made of SKS3 material under vacuum heating tretment to provide higher rigidity (HRC60°±2°) and satisfied wear-resistance.
- Center is constituted by dual ball beaning. Thrust bearing & needle roller bearing assembly.
- Applicable to high-speed lathe & NC lathe with heavy load water-proof.
- ※ B Type is applicable in the metal workings on small workpieces.

Unit:mm

ORDER NO.	TYPE	A	B	C	D	D1	b	L	d1	Accuracy	Speed Max	θ	G.W. weight kgs	Packing L x W x H	CODE NO.
VLC-MT3A	MT3A	39	55	86	53	30	-	180	12	0.005	4000RPM	60°	1.28Kgs	240x70x61	5001-020
VLC-MT4A	MT4A	42	62	108	63	32	-	212	12	0.005	3000RPM	60°	2.2Kgs	253x92x80	5001-021
VLC-MT5A	MT5A	57	71	136	83	40	-	264	18	0.005	2500RPM	60°	4.33Kgs	303x108x101	5001-022
VLC-MT6A	MT6A	80	115	139	128	70	-	384	-	0.008	1500RPM	60°	14.2Kgs	410x177x168	5001-023
VLC-MT3B	MT3B	45	55	86	53	30	10	186	12	0.005	4000RPM	60°	1.28Kgs	240x70x61	5001-024
VLC-MT4B	MT4B	52	62	108	63	32	12	222	12	0.005	3000RPM	60°	2.2Kgs	253x92x80	5001-025
VLC-MT5B	MT5B	67	71	136	83	40	14	274	18	0.005	2500RPM	60°	4.42Kgs	303x108x101	5001-026