




# Light Duty Live Center

## Blmaq & Silmaq

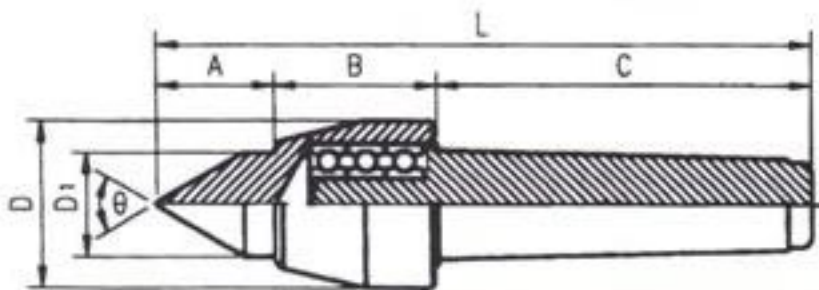

- Center is made of alloy steel under heating treatment to provide higher rigidity (HRC60 $\pm$ 2 $^{\circ}$ ) and satisfied wear-resistance.
- Center is constituted by ball bearings assembly.
- Applicable to middle-speed & high-speed lathe with light load.

Unit:mm

ORDER NO.	A	B	C	D	D1	L	Accuracy	Speed Max	$\theta$	G.W. weight kgs	PACKING LxWxH	CODE NO.
VPC-MT1	21	31	56	32	16	108	0.005	3200RPM	60 $^{\circ}$	0.25kgs	115x136x38	5001-001
VPC-MT2	26	37	69	40	22	132	0.005	2800RPM	60 $^{\circ}$	0.48kgs	140x45x45	5001-002
VPC-MT3	32	46	86	45	26	164	0.005	2000RPM	60 $^{\circ}$	0.83kgs	170x50x52	5001-003
VPC-MT4	34	46	108	48	30	188	0.005	1800RPM	60 $^{\circ}$	1.22kgs	195x58x56	5001-004
VPC-MT5	50	62	136	68	45	248	0.005	1500RPM	60 $^{\circ}$	3.3kgs	268x86x77	5001-005