



Touch Point Sensor




VPS-301




VPS-302




CERAMIC TYPE VPS-301C

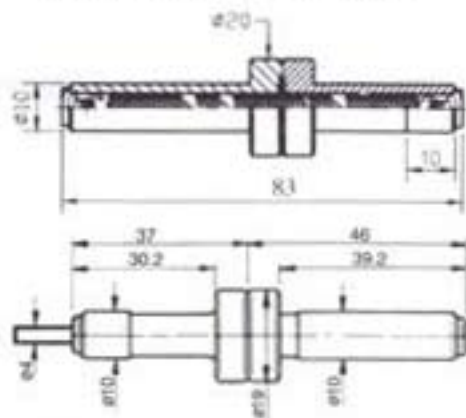

- Accuracy of zero point to point is within 0.003mm.
- R.P.M. within 450-600.
- Max. flange can be clear your sight sense.
- MIN. (4mm) can be test mini hole for your workpiece.



Spindle runs about 500rpm. move spindle closed to measuring surface.



When measuring probe touches workpiece, it looks in one part.



When the probe and shank are in alignment, probe will slide out of rotating center. Now, the center spindle is located 5mm away from measuring surface.

ORDER NO.	MATERIAL	HARDNESS	WEIGHT (kg)	CODE NO.
VPS-301	ALLOY	HRC 56°	0.03	3402-100
VPS-302	STEEL	HRC 56°	0.03	3402-101
VPS-301S	STAINLESS	HRC 60°	0.03	3402-102
VPS-302S				3402-103
VPS-301C				CERAMIC